


DB/FMD

Rozdzielnica z listwami DIN / Distribution board with DIN rail

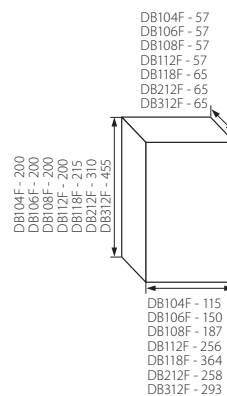

► obudowa, drzwiczki: tworzywo ABS / kolor: biały/brązowy

► casing, door: ABS plastic / colour: white/brown

Kanlux	Kanlux				[g]
DB104F 1X4P/FMD	03840	4P	1/-/20	450	
DB106F 1X6P/FMD	03841	6P	1/-/20	650	
DB108F 1X8P/FMD	03842	8P	1/-/20	510	
DB112F 1X12P/FMD	03843	12P	1/-/10	650	
DB118F 1X18P/FMD	03844	18P	1/-/10	1000	
DB212F 2X12P/FMD	03845	2 x 12P	1/-/10	1140	
DB312F 3X12P/FMD	03846	3 x 12P	1/-/5	1950	



drzwiczki uchylane ku górze / maksymalna dopuszczalna temperatura obudowy wynosząca 70°C / wytrzymałość na żar dla obudowy wynosząca 850°C, dla wyposażenia elektrycznego wynosząca 650°C/30s
 door opening upwards / maximum allowable housing temperature 70°C / housing heat resistance 850°C, for electric equipment 650°C/30s